



How to Setup Laptop Connection with Projector and Internet?


1) Front view of a projector.



Side view-Connection ports of the Projector.

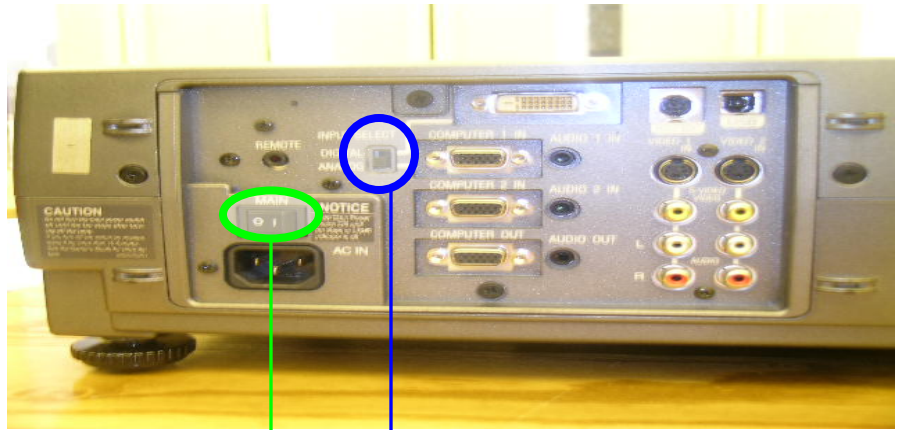


 This is the Main Power switch for the projector, so make sure that it is ON.

 This is the Mode Switch with the options as “Digital/Analog”.
This should be always kept as “Analog” for Computer connections to the Projector

2) The following accessories are required for setting up the connection between the Laptop, Projector and the Internet.

This the Power cord to provide the projector with the power supply.

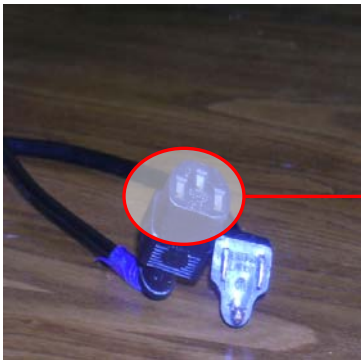

3) This is the Blue VGA cord for connecting the laptop's monitor with the projector's "Computer 1" input.



The other end of the cord is to be connected to the Laptop's monitor output





Back side view of the Toshiba Laptop.



Back side view of the Dell Laptop

(Note: Any end of the Blue VGA cord can be connected to either the projector or the monitor)

4) Connect the end of ACCC cable marked as “To PC”, to the Laptop’s bigger Ethernet Port.

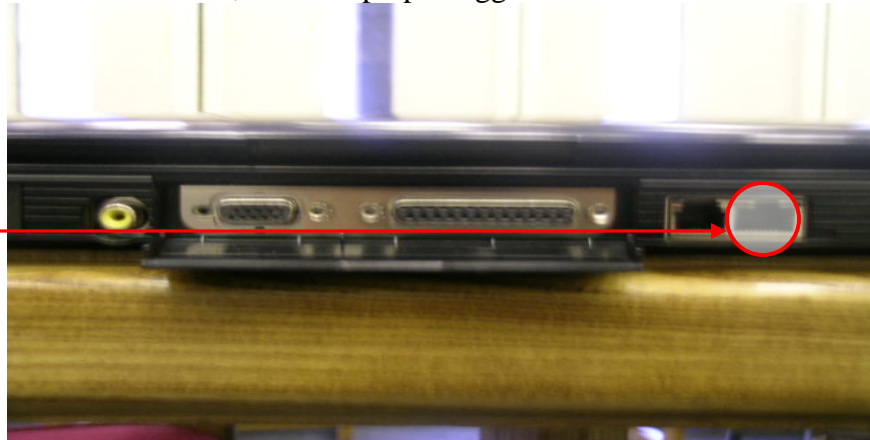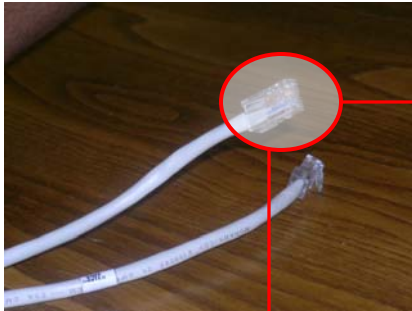

Back side view of the Toshiba Laptop



In Dell Laptop, the port is found at the side and not at the back as in Toshiba

5) Connect the other end of ACCC cable marked as “To Jack”, to the smaller port of the “Jack” on the floor.



“Jack” on the floor.

Once the connections are all set up, press the following key combinations to project the display on to the screen.

- a) Toshiba Laptop Blue FN key + F5 key
- b) Dell Laptop Blue FN key + F8 key

With these key combinations you can toggle between three modes of display,

- 1) Laptop’s monitor alone 2) Projector Screen alone 3) Both Laptop’s Monitor and Projector Screen simultaneously.
- 2) If the Laptop goes into “Sleep mode” displaying nothing just press the “Power” button in the Laptop to Reactivate it.